


FNSB

Recessed Luminaires



The FNSB series luminaires are designed in square and circular forms for mounting in suspended ceilings, enabling soft lighting applications. Thanks to the high-efficiency LEDs used, they provide significant energy savings. They offer practical solutions with their compatibility with different types of suspended ceilings as well as various power range options.

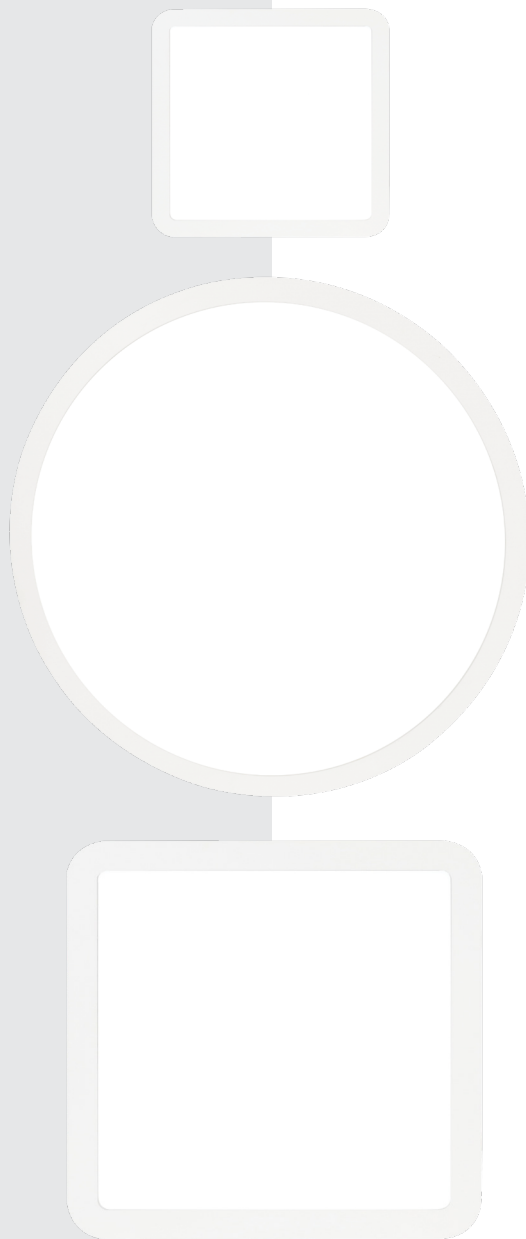

RAL COLORS

Std.

9016

Opt.

9005

9006

FNSB-K


IP20  

Code	Luminous Flux	System Power	Weight
FNSB-K 20	960 lm	10 W	2 Kg
FNSB-K 20	1.790 lm	20 W	2 Kg
FNSB-K 40	1.990 lm	30 W	3 Kg
FNSB-K 40	2.680 lm	40 W	3 Kg

Body: DKP sheet metal
Diffuser: Opal
Driver: Included

Beam Angle: 110°
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

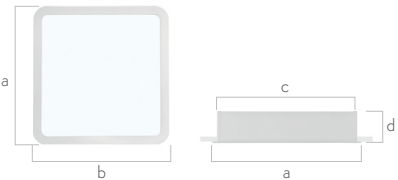

Code	a	b	c	d	Cut-Out
FNSB-K 20	200mm	200mm	169mm	82mm	175x175 mm
FNSB-K 40	400 mm	400mm	369mm	82mm	375x375 mm




BOX DIMENSIONS

FNSB-K/20 22x22x10 cm
 FNSB-K/40 42x42x10 cm



BOX WEIGHT

FNSB-K/20 2.4 kg
 FNSB-K/40 3.4 kg



RAL COLORS

Std.

9016

Opt.

9005

9006


FNSB-Y

IP20  

Code	Luminous Flux	System Power	Weight
FNSB-Y 25-17	1.800 lm	17 W	2 Kg
FNSB-Y 25-24	2.530 lm	24 W	2 Kg
FNSB-Y 35-22	1.650 lm	22 W	3 Kg
FNSB-Y 35-30	3.160 lm	30 W	3 Kg
FNSB-Y 55-40	3.510 lm	40 W	6.5 Kg

Body: DKP sheet metal

Diffuser: Opal

Driver: Included

Beam Angle: 112°

Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K

Led: Mid Power


Code	a	b	Cut-Out
FNSB-Y 25	250 mm	82 mm	Ø 238mm
FNSB-Y 35	350 mm	82 mm	Ø 338 mm
FNSB-Y 55	550 mm	82 mm	Ø 527 mm


BOX DIMENSIONS

FNSB-Y/25 27x27x10 cm

FNSB-Y/35 37x37x10 cm


FNSB-Y/55 57x57x10 cm


BOX WEIGHT

FNSB-Y/25 2.2 kg

FNSB-Y/35 3.4 kg

FNSB-Y/55 6.8 kg


cd/klm
— C0 - C180 — C90 - C270

