



GRM

Garden Lighting

This specialized outdoor lighting system is designed using high-efficiency LED technology, available in 10W and 15W power options. Engineered for architectural landscape applications, it is ideal for garden lighting, tree illumination, and accenting architectural details. The fixture features a corrosion-resistant die-cast aluminum body, ensuring long-term durability and resistance against harsh environmental conditions. Its robust construction, coupled with precisely engineered optics, allows for targeted illumination with minimal light spill, making it suitable for both decorative and functional outdoor lighting scenarios. Whether highlighting natural elements or structural features, this luminaire delivers consistent performance, energy efficiency, and aesthetic enhancement, all in a compact and reliable form factor.





RAL COLORS

- Std.  9005
- Opt.  9007
-  9006
-  7016
-  9016

GRM



Code	Beam Angle	Luminous Flux	System Power	Weight
GRM-15/24	24°	1.300 lm	15W	1 kg
GRM-15/40	40°	1.250 lm	15W	1 kg
GRM-10/24	24°	1.050 lm	10W	1 kg
GRM-10/40	40°	1.000 lm	10W	1 kg

Body: Aluminum extrusion

Lens: Polycarbonate

Color Temperature: 3000-4000-5000K

Led: COB

Voltage: 220~240VAC

Front Glass: 3mm Thick Tempered Glass



Accessories

GRM-K	Tree mounting bracket
GRM-L	Light control accessory

GRM-K



GRM-L

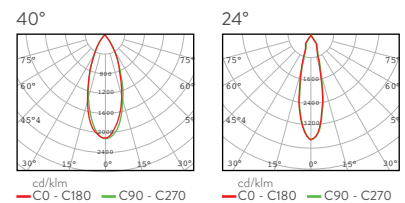

BOX DIMENSIONS
28x28.5x12cm



BOX WEIGHT
1.5 kg