

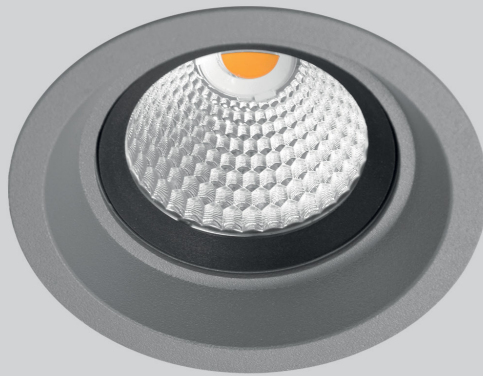


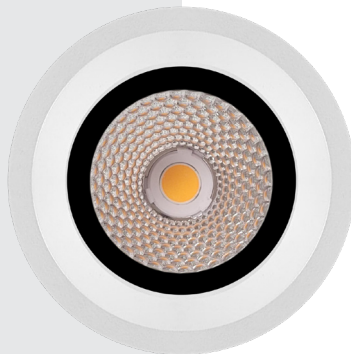

PULSAR

Downlight

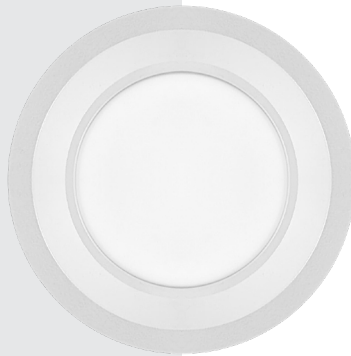

Pulsar downlight combines elegance and efficiency in modern interior designs. Its aluminum body provides effective heat dissipation for long-lasting use. It offers an ideal lighting solution for offices, stores, hotels, and residential areas. With its user-friendly design, it allows for easy installation and perfectly meets the needs of modern lighting.



RAL COLORS

Std.
9016

Opt.
9005
9006

PULSAR

IP20-IP65  

Code	Luminous Flux	System Power	Weight
PLS/C	2.300 lm	20 W	0.58 Kg
PLS/C	3.500 lm	30 W	0.58 Kg
PLS/OP	2.000 lm	20 W	0.58 Kg
PLS/OP	3.000 lm	30 W	0.58 Kg

HCL


Body: Aluminum Injection
Reflector: PC

Driver: Included
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K, TW
Led: COB



IP65 cable gland (optional)

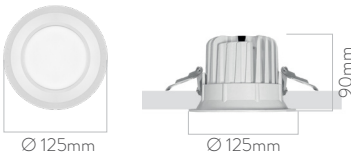

ACCESSORY



Honeycomb
Louvre

Code	Cut-Out
PLS	Ø 113mm


BOX DIMENSIONS
15x15x10 cm


BOX WEIGHT
0.7 kg

