

RLM/DK

Downlight



RLM-DK is developed for suspended ceiling applications where a track system is not desired on the ceiling. All electrical connections and components of RLM-DK spots remain above the suspended ceiling.

This provides a practical solution for all types of suspended ceiling applications, where only the spot, which can be directed in all directions and has different optical options, is visible in the space.



RAL COLORS

- Std.  9006
- Opt.  9005
-  9016

RLM DK

IP20  

Code	Beam Angle	Luminous Flux	System Power	Weight
RLM-DK NB	15°	1.180 lm	10 W	0.60 Kg
RLM-DK MB	40°	1.115 lm	10 W	0.60 Kg
RLM-DK WB	60°	1.130 lm	10 W	0.60 Kg
RLM-DK NB	15°	2.090 lm	20 W	0.60 Kg
RLM-DK MB	40°	2.005 lm	20 W	0.60 Kg
RLM-DK WB	60°	2.005 lm	20 W	0.60 Kg
RLM-DK NB	15°	3.030 lm	30 W	0.60 Kg
RLM-DK MB	40°	3.005 lm	30 W	0.60 Kg
RLM-DK WB	60°	3.010 lm	30 W	0.60 Kg

Body: Aluminum Injection

Reflector: PC

Color Temperature: 2700-3000-4000-5000-6500K

Body Frame: DKP Sheet metal

Voltage: 220~240 VAC


Led: COB

Driver: Included

ACCESSORY



Honeycomb Louvre

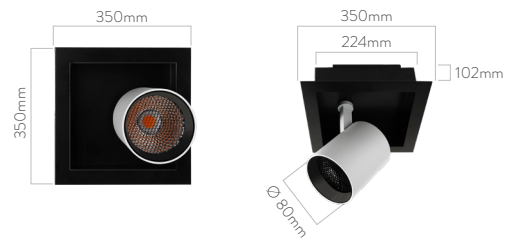

Code	Cut-Out
RLM/DK	280x280mm




BOX DIMENSIONS
37x37x12 cm




BOX WEIGHT
0.90 Kg

NARROW BEAM




cd/klm
— C0 - C180 — C90 - C270

MEDIUM BEAM



cd/klm
— C0 - C180 — C90 - C270

WIDE BEAM



cd/klm
— C0 - C180 — C90 - C270