




## Industrial Lighting


### TEKNOMAX

IP66


TEKNOMAX luminaires are designed for operating without any problems in industrial locations where luminaire bodies are exposed to harsh environment conditions. The luminous efficiency of the luminaires has been reached to extremely high levels. The luminaire efficiency comes from combining the optic design with the newest generation LEDs in the most appropriate way. Narrow and wide angle types of luminaires can be produced according to ceiling heights. Luminaires can be installed in any way using busbar, cable tanks and free hangers.



#### Brackets



HCL-YT/AB  
Busbar





HCL-YT/AK  
Cable Tray




HCL-YT/AG  
Free bracket




HCL-YT/AS

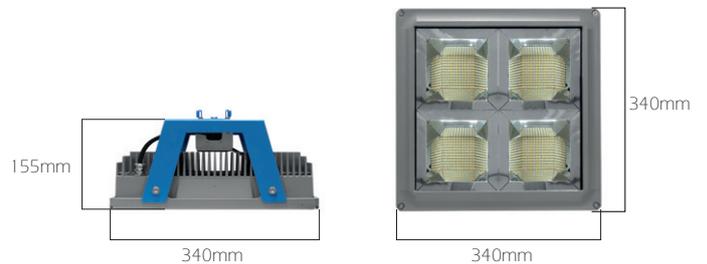

#### Narrow Angle



#### Wide Angle



Code	HCL-YT 50	HCL-YT 100	HCL-YT 150	HCL-YT 200	HCL-YT 240
LED	High efficiency Mid-Power LED				
System Power	50W	100W	150W	200W	240W
Light Flux	7.000lm	13.000lm	19.500 lm	25.000 lm	30.000 lm
Colour Temperature	3000 - 4000 - 5000 K				
Voltage	220V - 50Hz				
Body	Aluminum injection				
Reflector	Alanod Miro Silver aluminum				
Diffuser	Impact resistance tempered glass with serigraphy printed				
Colour	Grey				
Weight	13.000 gr				